

AL/EQ-TR-1996-0050


UNITED STATES AIR FORCE ARMSTRONG LABORATORY

Effect of Dissolved Matter on Fe (II) Transport in Groundwater

Eric J. Henry

Department of Civil and Environmental Engineering
Washington State University
Pullman, WA

February, 1997

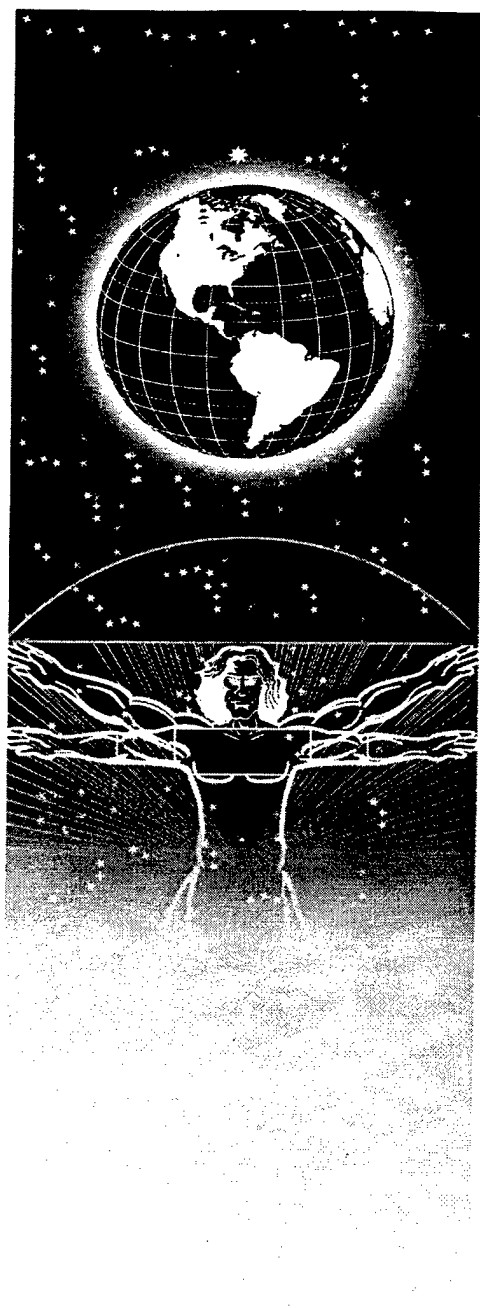

19981118 114

Approved for public release; distribution is unlimited.

Enviroics Directorate
Environmental Research
Division
139 Barnes Drive
Tyndall Air Force Base FL
32403-5323

DTIC QUALITY INSPECTED 4

NOTICES


This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any employees, nor any of their contractors, subcontractors, or their employees, make any warranty, expressed or implied, or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency, contractor, or subcontractor thereof. The views and opinions of the authors expressed herein do not necessarily state or reflect those of the United States Government or any agency, contractor, or subcontractor thereof.

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely Government-related procurement, the United States Government incurs no responsibility or any obligation whatsoever. The fact that the Government may have formulated or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication, or otherwise in any manner construed, as licensing the holder or any other person or corporation; or as conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This technical report has been reviewed by the Public Affairs Office (PA) and is releasable to the National Technical Information Service, where it will be available to the general public, including foreign nationals.

This report has been reviewed and is approved for publication.

FOR THE COMMANDER:

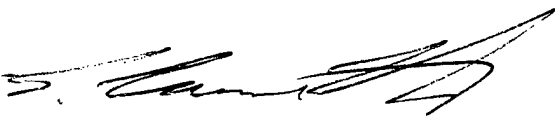

E. LAURENCE LIBELO, PhD, PG
Project Manager



JIMMY C. CORNETTE, PhD
Chief, Environmental Research Division

1. Report Date (dd-mm-yy) February 1997		2. Report Type AFOSR		3. Dates covered (from... to) 6-96 to 8-96	
4. Title & subtitle Effect of Dissolved Organic Matter on Fe(II) Transport in Groundwater				5a. Contract or Grant # AFOSR SUMMER FACULTY	
				5b. Program Element #	
6. Author(s) Eric J. Henry				5c. Project #	
				5d. Task #	
				5e. Work Unit #	
7. Performing Organization Name & Address Department of Civil and Environmental Engineering Washington State University Pullman WA				8. Performing Organization Report #	
9. Sponsoring/Monitoring Agency Name & Address Armstrong Laboratory AL/EQC 139 Barnes Dr. Suite 2 Tyndall AFB FL 32403				10. Monitor Acronym	
				11. Monitor Report # AL/EQ-TR-1996-0050	
12. Distribution/Availability Statement APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED					
13. Supplementary Notes AL/EQL Project Manager was Dr E. Laurence Libelo, (904) 283-6036					
14. Abstract As the focus of ground water remediation efforts shifts increasingly towards natural attenuation as an alternative method for documenting and quantifying such intrinsic remediation. One indicator of natural attenuation under iron-reducing conditions is concentration of dissolved Fe(II). However, if Fe(II) is to be used to quantify the degradation of groundwater contaminants the process controlling Fe(II) transport in the subsurface must be better understood. Dissolved metals, such as Fe (II) can interact with dissolved organic matter (DOM) to produce both mobile and immobile complexes. These complexes may display sorptive characteristics different than those of the dissolved metal alone, thus potentially facilitating or retarding transport of the metal. Microcosm sorption studies were conducted to determine the effects of DOM on Fe(II) sorption to aquifer solids from 3 U.S. Air Force Bases as a function of ionic strength (I). DOM at a concentration of 32 mg TOC/L resulted in a marked increase in the sorption of Fe(II) to each of the aquifer solids at I=0.01 M, as judged by Freundlich non-linear isotherm fits of the data. Sorption of Fe(II) in the presence of DOM at I=0.1 also increased over that of DOM-free systems but was less than that in the I=0.01 systems, indicating an inverse relationship between Fe(II) sorption and ionic strength.					
15. Subject Terms Sorption, Fe(II), Groundwater					
Security Classification of			19. Limitation of Abstract	20. # of Pages 19	21. Responsible Person (Name and Telephone #) E. Laurance Libelo, PhD 904-283-6039
16. Report unclass	17. Abstract unclass	18. This Page unclass			

PREFACE

This report was prepared as part of the Air Force Office of Scientific Research Summer Faculty Research Program sponsored by Armstrong Laboratory's Environics Directorate, Tyndall Air Force Base, Florida 32403.

The report covers research performed by Eric J. Henry, Graduate Student at Washington State University, between June and August 1988. The report is being reprinted and sent to Defense Technical Information Center because of its interest to the DOD and worldwide scientific and engineering communities. The AL/EQ mentor was Dr. E. Laurance Libelo. The AL/EQ Summer Faculty Coordinator was Ms. Mary Reynolds.

(The reverse of this page is blank)

EFFECT OF DISSOLVED ORGANIC MATTER ON
Fe(II) TRANSPORT IN GROUNDWATER

Eric J. Henry
Graduate Student
Department of Civil and Environmental Engineering

Washington State University
Pullman, WA 99164

Final Report for :
Summer Graduate Student Research Program
Armstrong Laboratory

Sponsored by:
Air Force Office of Scientific Research
Bolling AFB, Washington DC

and
Armstrong Laboratory

September 1996

EFFECT OF DISSOLVED ORGANIC MATTER ON Fe(II) TRANSPORT IN GROUNDWATER

Eric J. Henry
Graduate Student
Department of Civil and Environmental Engineering
Washington State University

Abstract

As the focus of groundwater remediation efforts shifts increasingly towards natural attenuation as an alternative method for subsurface restoration, a great deal of research must now focus on methods for documenting and quantifying such intrinsic remediation. One indicator of natural attenuation under iron-reducing conditions is concentration of dissolved Fe(II). However, if Fe(II) is to be used to quantify the degradation of groundwater contaminants the processes controlling Fe(II) transport in the subsurface must be better understood.

Dissolved metals, such as Fe(II) can interact with dissolved organic matter (DOM) to produce both mobile and immobile complexes. These complexes may display sorptive characteristics different than those of the dissolved metal alone, thus potentially facilitating or retarding transport of the metal. Microcosm sorption studies were conducted to determine the effects of DOM on Fe(II) sorption to aquifer solids from 3 U.S. Air Force Bases as a function of ionic strength (I). DOM at a concentration of 32 mg TOC/L resulted in a marked increase in the sorption of Fe(II) to each of the aquifer solids at $I = 0.01$ M, as judged by Freundlich non-linear isotherm fits of the data. Sorption of Fe(II) in the presence of DOM at $I = 0.1$ also increased over that of DOM-free systems but was less than that in the $I = 0.01$ systems, indicating a inverse relationship between Fe(II) sorption and ionic strength.

TABLE OF CONTENTS

Introduction.....	5
Materials and Methods.....	6
Results and Discussion.....	10
Conclusions and Need For Future Work	12
Acknowledgments	12
Literature Cited	13
Tables and Figures	15

LIST OF TABLES

Table	Page
1. Characteristics of Aquifer Sediments	15
2. Elemental Composition and Physical Properties of Aldrich Humic Acid	15
3. Linear and Freundlich Isotherm Parameters	15

LIST OF FIGURES

Figure	Page
1. Schematic Drawing of Equilibrium Sorption Experiment Setup	16
2. Example Fe(II) Sorption Isotherm: TOC = 32 mg/L, I = 0.01	16
3. Freundlich Isotherm: Barksdale, I = 0.01	17
4. Freundlich Isotherm: Barksdale, I = 0.1	17
5. Freundlich Isotherm: Blytheville, I = 0.01	17
6. Freundlich Isotherm: Blytheville, I = 0.1	17
7. Freundlich Isotherm: Columbus, I = 0.01	18
8. Freundlich Isotherm: Columbus, I = 0.1	18
9. Sorption Isotherms: Barksdale	19
10. Sorption Isotherms: Blytheville	19
11. Sorption Isotherms: Columbus	19

EFFECT OF DISSOLVED ORGANIC MATTER ON Fe(II) TRANSPORT IN GROUNDWATER

Eric J. Henry

Introduction

As the focus of groundwater remediation efforts shifts increasingly towards natural attenuation as an alternative method for subsurface restoration, a great deal of research must now focus on methods for documenting and quantifying such intrinsic remediation. One indicator of natural attenuation under iron-reducing conditions is concentration of dissolved Fe(II). During the microbial degradation of organic contaminants in anaerobic systems with Fe(III) the electron acceptor, Fe(III) is reduced to Fe(II), and Fe(II) concentrations increase (Wiedemeier *et al.*, 1995). Fe(II) can be used to quantify the degradation of groundwater contaminants if the processes controlling Fe(II) transport in the subsurface are understood.

Sorption has been identified as having a potentially significant effect on the transport of metals in the subsurface (Coughlin and Stone, 1995). Additionally, dissolved metals, such as Fe(II) can interact with dissolved organic matter (DOM) to produce both mobile and immobile complexes. These complexes may enhance or decrease sorption distribution between dissolved and solid phases, thus potentially facilitating or retarding transport of the metal. The ability of DOM, such as natural humic substances, to perform in this regard is dependent upon contaminant-humic, contaminant-sediment, and humic-sediment affinities as well as the kinetics of each of these interactions (Johnson and Amy, 1995). The strong affinity for metals to form complexes with humic substances has been well documented (Sposito, 1986; Perdue, 1989; Oden *et al.*, 1993; Benedetti *et al.*, 1995), and therefore a humic acid was chosen as a representative DOM for this investigation. Piana (1995) has described the sorption of Aldrich Humic Acid (AHA) onto aquifer solids from three U.S. Air Force Bases: Columbus AFB, Mississippi, Barksdale AFB, Louisiana and Blytheville AFB, Arkansas, and Libelo (in prep.) has described the sorption of Fe(II) onto the same three aquifer solids. In order to supplement the data collected by Libelo and Piana, and maximize the relevancy of this research project, it was decided to investigate the effect of AHA on Fe(II) sorption onto the same aquifer solids.

Materials and Methods

General Description:

Batch sorption studies were conducted on three aquifer solids at two ionic strengths to describe the effect of natural organic matter on Fe(II) sorption. Dialysis tubing was used to achieve phase separation between the free ferrous ion and the ferrous-organic complex in order to describe the partitioning of Fe(II) to the humic acid. All experiments were carried out in 20 mL glass serum vials under anaerobic conditions to ensure that decreases in the aqueous Fe(II) concentration due to oxidation to Fe(III) were negligible. Anaerobic conditions were established and maintained either through bench-top nitrogen purging or operation within an anaerobic glove box. All solutions and dilution waters were nitrogen purged for 1 hour before use.

Aquifer Solids:

The substrates investigated in this study were obtained from Dr. T. Stauffer, Armstrong Laboratory, Tyndall AFB, FL, and consisted of unconsolidated sediments from aquifers at 3 Air Force Bases: Columbus AFB, Mississippi, Barksdale AFB, Louisiana and Blytheville AFB, Arkansas. Specifically, the fraction of each sediment less than 2 millimeters was used in these experiments. Stauffer (1987) and Libelo (1995) have characterized each of the sediments and a summary is presented in Table 1.

Ionic Strength:

McCarthy and Zachara (1989) note that solution chemistry, including ionic strength and pH, can have an impact on contaminant sorption, and that such issues remain as areas which merit additional investigation. A number of researchers, including Westall *et al.* (1995), and Zachara *et al.* (1994) have shown metal sorption and complexation with humic acid to be a function of the geochemistry of the system. To determine the impact of ionic strength on Fe(II) sorption, all experiments described in this report were performed in ionic strength buffers of 0.01 and 0.1 M sodium perchlorate (NaClO_4) dissolved in Milli-Q ($\approx 18\text{M}\Omega$) water. In the interest of time and in order to keep the chemistry of the experimental systems as

simple as possible to avoid possible buffer ion effects, no controls on pH were instituted. The pH of the samples following equilibration was measured and ranged from 4.5-5.5.

Humic Acid Solutions and Analysis:

Aldrich Humic Acid (Aldrich, Milwaukee, WI) was used as a representative dissolved organic matter. 1000 mg/L humic acid solutions were prepared in ionic strength buffer solutions of 0.1 M and 0.01 M NaClO₄. Preliminary experiments showed the dissolved AHA to be approximately 32 % total organic carbon (TOC) by weight. All TOC measurements were made using a Shimadzu TOC-5000 combustion/non-disperse infrared gas analysis system (Shimadzu Corp., Kyoto, Japan). Kim *et al.*, (1990) provide further characterization of Aldrich HA which is summarized in Table 2.

Most groundwaters have dissolved organic carbon concentrations below 2 mg C/L, with a median value of about 0.7 mg C/L (Leenheer *et al.*, 1974, referenced by Drever, 1988). Aiken *et al.* (1985, referenced by Piana, 1995) report TOC values of natural waters between 1 and 30 mg C/L. A total organic carbon value at the high end of typical values, 32 mg C/L, was used for all experiments. It was expected that any variation in the sorption characteristics of Fe(II) due to the presence of DOM would increase with increasing TOC concentration and the use of a high concentration of TOC should therefore make those effects more pronounced and easily identified.

Fe(II) Solutions and Analysis:

Ferrous iron stock solutions were prepared by dissolving ferrous ammonium sulfate, Fe(NH₄)₂(SO₄)₂, in 0.1 and 0.01 M ionic strength buffers under nitrogen gas purge. Analysis of aqueous Fe(II) was conducted using a variation of the Ferrozine method described by Stookey (1970) and Gibbs (1976). Briefly, Ferrozine reagent forms a complex with Fe(II) which allows spectrophotometric analysis with the maximum absorbance occurring at a wavelength of 562 nanometers.

Ferrozine reagent was prepared by dissolving approximately 12 grams of HEPES buffer and 1 gram of Ferrozine (Aldrich) and diluting to 1 liter with Milli-Q water. Serial dilutions of the Fe(II) stock solutions were made, again using nitrogen purged ionic strength solutions, and a calibration curve developed. All

calibration standards, as well experimental samples, were prepared prior to analysis by the addition of 100 microliters of sample to 2 mL of Ferrozine reagent in a glass sample vial. Analyses were performed using a Cary 3E UV-Visible Spectrophotometer (Varian Instruments). The calibration curve was found to be linear throughout the range of interest for these experiments (0-100 mg Fe(II)/L).

Dialysis Tubing:

The molecular weights of dissolved organic matter range from 500 to 30,000 (Amy *et al.*, 1992). Particles within this size range are not settleable using centrifugation and therefore it was necessary to utilize another technique to obtain phase separation between ferrous ion in the free ion form, denoted Fe^{2+} , and that which is complexed with HA, denoted Fe^{2+} -HA. Dialysis tubing was chosen for phase separation because it is available in molecular weight cutoffs (MWCO) as low as 1000 and other researchers have shown it to be both effective for HA separation (Carter and Suffet, 1982; Zachara *et al.*, 1994) and durable within a system containing sediment (Allen-King *et al.*, 1995). Additionally, dialysis tubing has the advantage of achieving phase separation and equilibration simultaneously.

Spectra/Por 7, Regenerated Cellulose Membrane Dialysis Tubing, MWCO = 1000, flat width = 18 mm, was chosen for use because it is free of heavy metals and may be easily sealed by tying. The tubing is packaged in a dilute solution of sodium azide and required rinsing before use. The rinsing procedure consisted of placing the tubing in a 600 mL beaker filled with Milli-Q water, shaking the beaker for 1 minute, and then pouring the water into a waste container. This procedure was repeated 5 times. When not in use, rinsed tubing was stored in Milli-Q water.

Following rinsing, the dialysis tubing was cut into 16 centimeter lengths and one end tied. The tubing was then opened and 3 mL of ionic strength solution, appropriate to the given experiment, was pipetted into the tubing and the open end tied, forming a dialysis 'bag'. Excess tubing was trimmed away before placing the dialysis bag into the sample vials. An illustrative description of the experimental setup is shown in figure 1.

Rate Experiments:

Equilibrium is reached within 24 hours with regard to both HA sorption and Fe(II) sorption to each of the 3 substrates (Piana, 1995; Libelo, in prep.). Therefore, so that the experimental run time could be minimized, it was desired to show that the diffusion of Fe(II) through the bag reached equilibrium within 24 hours. The time required for diffusion equilibrium was determined by placing a dialysis bag filled with 5 mL of 0.1 M ionic strength solution into a sample vial containing 14 mL of 60 mg/L Fe(II) solution. Enough vials were prepared in this manner to allow sampling at 4 different times, in triplicate. At time increments of 1, 2, 4, and 7 days, samples were withdrawn from the inside and outside of the bag. Change in Fe(II) concentration within the bag was not detectable at times greater than 1 day, thus an equilibration period of 1 day was deemed to be satisfactory.

Analogous experiments were conducted to ensure that diffusion of AHA through the bag within the 1 day equilibration period was negligible. The TOC concentration within the bag after 1 day was approximately 5.5 % of the total TOC in the system. Comparison to controls indicated an increase with time in the total TOC present in the systems which contained dialysis bags even though the outer TOC concentration did not increase noticeably. This suggests that the TOC within the bag was derived from the dialysis tubing and AHA diffusion was deemed negligible.

Equilibrium Adsorption Isotherms:

Fe(II) sorption isotherms were developed at a constant TOC of 32 mg C/L, at ionic strengths of 0.01 and 0.1, in triplicate. Ferrous iron solutions were made at five different concentrations (approximately 75, 57, 38, 19, and 8 mg Fe(II)/L). Two grams of sediment, 1.4 mL of 1000 mg/L humic acid (320 mg C/L), and 12.6 mL of the appropriate ferrous iron solution were added to a 20 mL serum vial. A dialysis bag was then filled with 3 mL of ionic strength solution, placed in the vial, and the vial sealed. Controls were also prepared at the same dilutions, without sediment or humic acids.

Following 1 day equilibration on a rotary shaker, samples were removed and centrifuged (Damon/IEC EPR-6000) at 2000 rpm for 5 minutes. The solutions from inside and outside the dialysis bag

were then extracted using a volumetric syringe and 100 uL of each sample filtered (0.45 μm) and added to 2 mL of Ferrozine for Fe(II) analysis. Following spectrophotometric analysis of all samples the total mass of Fe(II) added to each vial was determined using controls. The concentration of Fe(II) sorbed was then calculated using a mass balance and isotherms developed.

Sorption to solid substrates is often described as a linear partitioning of the contaminant between aqueous and solid phases:

$$C_s = K_d C_w \quad (1)$$

where, C_s and C_w are the concentrations of the solute sorbed to the solid and dissolved in water, respectively, and K_d is the partitioning coefficient. Such a distribution assumes that sorption is independent of contaminant concentration and is defined as a linear isotherm. Frequently, however, a distribution of contaminant between the aqueous and solid phase which is non-linear with respect to the dissolved species is observed (Grathwohl, 1990). These non-linear partitioning distributions may be described using the Freundlich isotherm, equation 2:

$$C_s = K_f C_w^{1/n} \quad (2)$$

where C_s and C_w are as defined as above, K_f is the Freundlich partitioning coefficient, and $1/n$ is a constant describing the dependence on solute concentration. The data from these experiments were fit with each type of isotherm and the results are presented in the following section.

Results And Discussion

At a TOC concentration of 32 mg/L, there was no statistical difference between the Fe(II) concentrations inside and outside of the dialysis bag. It was not possible, therefore, to describe the partitioning between of Fe(II) between the free ion phase, Fe^{2+} , and the humic complexed phase, $\text{Fe}^{2+}\text{-HA}$. The overall effect of AHA on Fe(II) sorption can be evaluated by the comparison of isotherms from systems containing AHA to isotherms from HA-free systems. The data from the HA-free systems have been kindly provided by Libelo (personal communication). In all systems (fixed HA concentration, fixed ionic strength) the order of decreasing affinity for Fe(II) sorption as a result of substrate type proceeds as Blytheville >

Columbus > Barksdale. As an example, the isotherms for each substrate in an $I = 0.01$ system containing HA are given in figure 2.

The sorption isotherms depicted in figures 3 through 8 graphically illustrate the influence of HA on Fe(II) sorption at $I = 0.01$ and $I = 0.1$. The data were also modeled using linear and Freundlich isotherm expressions and the results are given in table 3. As judged by the r^2 values, the Freundlich isotherm typically yields the best fit and further discussion of the characteristic curves will be based on the Freundlich parameters.

Because both the K_f and $1/n$ values differ for each set of experiments it is difficult to compare the systems simply based on these values. As a semi-quantitative means of comparison, the sorbed equilibrium concentration was calculated according to the Freundlich equation corresponding to a dissolved Fe(II) concentration of 15 mg/L and these values are given in table 3. This concentration was chosen as an approximation of Fe(II) values occurring within an iron reducing environment of a polluted aquifer as reported by Albrechtsen and Christensen (1994).

From the graphs (3-8) it may be observed that the effect of AHA at low concentrations of Fe(II) is minimal, as should be expected according to both isotherm models. Of interest, however, is the trend which may be observed at increasing Fe(II) concentrations. Figures 3, 5, 7, and 8 reveal an marked increase in sorption of Fe(II) in the presence of AHA over that of HA-free systems. This conclusion is also supported by the calculated estimates of C_s in table 3. Some difficulty is associated with the use of figures 6 and 8 for supposition because the two isotherms being compared in each case encompass greatly varying Fe(II) concentrations.

Figures 9 through 11 contain all 4 isotherms ($I = 0.1$ and 0.01 , 32 mg C/L and No AHA) for each substrate, and suggest that the sorption of Fe(II) in the presence of AHA decreases with increasing ionic strength. Other researchers have also shown this to be the case in metal-organic systems (Zachara *et al.*, 1994; Westall *et al.*, 1995) and associated this decrease in sorption with an decrease in the affinity of the organic for complexation with the dissolved metal at higher ionic strengths.

Conclusions and Recommendations for Future Work

The presence of dissolved organic matter has been shown to increase the sorption of dissolved Fe(II) to aquifer solids. This effect is enhanced as the ionic strength of the system decreases. The implication these results have for the use of dissolved Fe(II) as an indicator of natural attenuation is that measured Fe(II) concentrations in groundwater may underpredict the true production of Fe(II) during microbial degradation of organic contaminants under iron reducing conditions. Though this underprediction would yield a conservative estimate of the time necessary to achieve adequate remediation, such estimates are inefficient and may result in wasted time, money, and resources.

In order to obtain the best possible estimates of contaminant degradation rates additional research must be conducted to determine the effects of system geochemistry, including pH, redox, and the presence of competing sorbates on Fe(II) sorption in the presence of dissolved organic matter. Once such data is collected it should be possible to combine it with the data base already established by Piana (1995) and Libelo (in prep) to model Fe(II) sorption dynamics in the subsurface.

Acknowledgments

This work was funded by the Air Force Office of Scientific Research, Bolling AFB, Washington DC. I would like to sincerely thank the Armstrong Laboratory personnel, notably Dr. Laurence Libelo and Dr. Thomas Stauffer. Marlene Cantrell and Eila Burr of Applied Research Associates were always happy to provide laboratory assistance and Dr. Richelle Allen-King and Dr. William MacIntyre provided additional support during the course of this project.

Literature Cited

- Aiken, G.R., McKnight, D.K., Wershaw, R.L. and P. MacCarthy, eds., Humic Substances in Soil, Sediment, and Water: Geochemistry, Isolation and Characterization. John Wiley and Sons, New York, 1985.
- Albrechtsen, H. and T.H. Christensen, "Evidence for microbial iron reduction in a landfill leachate-polluted aquifer (Vejen, Denmark)," Appl. and Environ. Microbiol. 60(11) 3920-3925 (1994).
- Allen-King, R.M., H. Groenevelt and D.M. Mackay, "Analytical method for the sorption of hydrophobic organic pollutants in Clay-Rich Materials," Environ. Sci. and Technol., 29(1): 148-153 (1995).
- Amy, G.L., Sierka, R.A., Bedessem, J., Price, D. and L. Tan, "Molecular size distributions of dissolved organic matter," JAWWA, 84: 67-75.
- Benedetti, M.F., Milne, C.J., Kinniburgh, D.G., Van Riemsdijk, W.H. and L.K. Koopal, "Metal ion binding to humic substances: Application of the non-ideal competitive adsorption model," Environ. Sci. and Technol., 29(2): 446-457 (1995).
- Carter, C.W. and I.H. Suffet, "Binding of DDT to dissolved humic materials," Environ. Sci. and Technol., 16(11): 735-740 (1982).
- Coughlin, B.R. and A.T. Stone, "Nonreversible adsorption of divalent metal ions (Mn(II), Co(II), Ni(II), Cu(II), and Pb(II)) onto goethite: Effects of acidification, Fe(II) addition, and picolinic acid addition," Environ. Sci. and Technol., 29(9): 2445-2455 (1995).
- Drever, J.I., The Geochemistry of Natural Waters, 2nd ed., Prentice Hall, New Jersey, 1988.
- Gibbs, C.R., "Characterization and application of ferrozine iron reagent as a ferrous iron indicator," Anal. Chem., 48(8): 1197-1201 (1976).
- Grathwohl, P., "Influence of organic matter from soils and sediments from various origins on the sorption of some chlorinated aliphatic hydrocarbons: Implications on Koc correlations," Environ. Sci. and Technol., 24: (1995).
- Johnson, W.P. and G.L. Amy, "Facilitated transport and enhanced desorption of polycyclic aromatic hydrocarbons by natural organic matter in aquifer sediments," Environ. Sci. and Technol., 29(3): 807-817 (1995).
- Kim, J.I., G. Backau, R. Klenze, D.S. Rhee and H. Wimmer, "Characterization and complexation of humic acid," Institut für Radiochemie der Technischen Universität München-Final Report for the CEC project Mirage II, 1990.
- Leenheer, J.A., "Fractionation techniques for aquatic humic substances," Humic Substances in Soil, Sediment, and Water, G.R. Aiken *et al.*, eds. Wiley-Interscience, New York, pp. 409-429, 1985.
- Libelo, E.L., "Studies on processes controlling the input of agricultural chemicals in groundwater to surface waters," Ph.D. Dissertation, The College of William and Mary, 1995.
- Libelo, E.L., Armstrong Laboratory, Tyndall Air Force Base, FL, personal communication, 1996.
- McCarthy, J.F. and J.M. Zachara, "Subsurface transport of contaminants," Environ. Sci. and Technol., 23(5): 496-502 (1989).

- Mills, W.B., S. Liu and F.K. Fong, "Literature review and model (COMET) for colloid/metals transport in porous media," Ground Water, 29: 199-208, (1991).
- Oden, W.I., G.L. Amy and M. Conklin, "Subsurface interactions of humic substances with Cu(II) in saturated media," Environ. Sci. and Technol., 27(6): 1045-1051 (1993).
- Perdue, E.M., "Effects of humic substances on metal speciation," pp 281-295 in Aquatic Humic Substances: Influence on Fate and Treatment of Pollutants, eds. I.H. Suffet and P. MacCarthy, American Chemical Society, Washington, D.C., 1989.
- Piana, M.J., "The sorption of humic acids onto aquifer material solids," Final Report for AFOSR Summer Graduate Student Research Program, Armstrong Laboratory, August 1995.
- Sposito, G., "Sorption of trace metals by humic materials in soils and natural waters," CRC Critical Reviews in Environmental Control, 16(2): 193-229, (1986).
- Stauffer, T.B., "Sorption of nonpolar organics on minerals and aquifer materials," Ph.D. Dissertation, The College of William and Mary, 1987.
- Stookey, L.L., "Ferrozine-A New Spectrophotometric Reagent for Iron," Anal. Chem., 42(7): 779-781 (1970).
- Westall, J.C., Jones, J.D., Turner, G.D. and J.M. Zachara, "Models for association of metal ions with heterogeneous environmental sorbents. 1. Complexation of Co(II) by Leonardite Humic Acid as a function of pH and NaClO₄ concentration," Environ. Sci. and Technol., 29(4): 951-959 (1995).
- Wiedemeier, T.H., Wilson, J.T., Kampbell, D.H., Miller, R.N., and J.E. Hansen, Technical Protocol for Implementing Intrinsic Remediation with Long-Term Monitoring for Natural Attenuation of Fuel Contamination Dissolved in Groundwater. Air Force Center for Environmental Excellence, Brooks Air Force Base, Texas, 1995.
- Zachara, J.M., C.T. Resch and S.C. Smith, "Influence of humic substances on cobalt(II) sorption by a subsurface mineral separate and its mineralogic components," Geochimica et Cosmochimica Acta, Vol. 58(2): 553-566 (1994).

Table 1. Characteristics of Aquifer Sediments

Aquifer	Total Organic Carbon %	Surface Area m ² /g	Dithionate Extractable Iron g/kg	% Sand	% Silt	% Clay
Barkesdale	0.0338	0.88	0.112	96.1	1.94	1.97
Blytheville	0.0676	9.32	1.640	95.6	3.06	1.34
Columbus	0.0596	5.78	0.914	70.8	17.50	11.68

Table 2. Elemental Composition and Physical Properties of Aldrich Humic Acid

C	H	N	S	O	Other	H/C ratio	O/C ratio	Aromatic C (110-165)	Aliphatic C (0-90)	Carboxyl C (165-190) PPM
41.72	4.37	0.25	1.90	36.93	14.83	1.03	0.51	40	41	14

Table 3. Linear and Freundlich Isotherm Parameters

Sediment	Condition	log K _f ^a	1/n ^a	r ²	C _s ^b	Kd ^c	r ²	n ^d
Barkesdale	No HA, I=.01	1.084 (1.052-1.116)	0.512 (.476-.549)	0.985	48.6	2.52	0.93	16
	HA, I=.01	1.182 (1.132-1.233)	0.646 (.603-.690)	0.987	87.4	3.58	0.94	15
	No HA, I=.1	1.350 (1.212-1.488)	0.336 (.279-.402)	0.903	55.6	0.26	0.76	15
	HA, I=.1	1.182 (1.011-1.354)	0.431 (.289-.573)	0.860	48.9	1.39	0.75	10
Blytheville	No HA, I=.01	1.693 (1.591-1.796)	0.207 (.033-.381)	0.530	86.4	5.53	0.76	9
	HA, I=.01	1.734 (1.680-1.788)	0.539 (.476-.602)	0.963	233.3	10.61	0.93	15
	No HA, I=.1	1.722 (1.622-1.822)	0.307 (.260-.354)	0.992	121.1	0.30	0.74	18
	HA, I=.1	1.550 (1.411-1.689)	0.536 (.395-.676)	0.906	151.5	8.05	0.85	10
Columbus	No HA, I=.01	1.124 (1.101-1.180)	0.590 (.564-.617)	0.993	65.8	4.32	0.95	19
	HA, I=.01	1.516 (1.485-1.548)	0.502 (.471-.533)	0.990	127.8	4.52	0.91	15
	No HA, I=.1	1.244 (.942-1.545)	0.336 (.204-.468)	0.646	43.6	0.65	0.25	18
	HA, I=.1	0.957 (.915-.999)	0.646 (.612-.681)	0.992	52.1	2.08	0.97	15

a.) 95% confidence interval in brackets; b.) sorbed concentration, C_s, at C_w = 15 mg Fe(II)/L calculated using Freundlich isotherm coefficients; c.) linear isotherm not forced through zero; d.) n = number of samples

Figure 1. Schematic Drawing of Equilibrium Sorption Experiment Setup

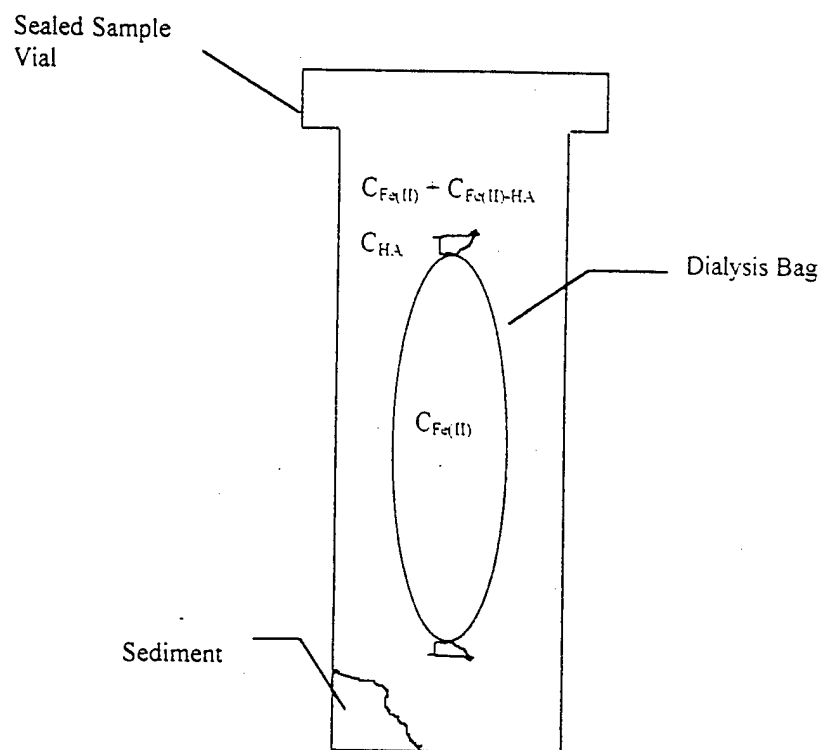


Figure 2. Example Fe(II) Sorption Isotherm
TOC = 32 mg/L, I = 0.01

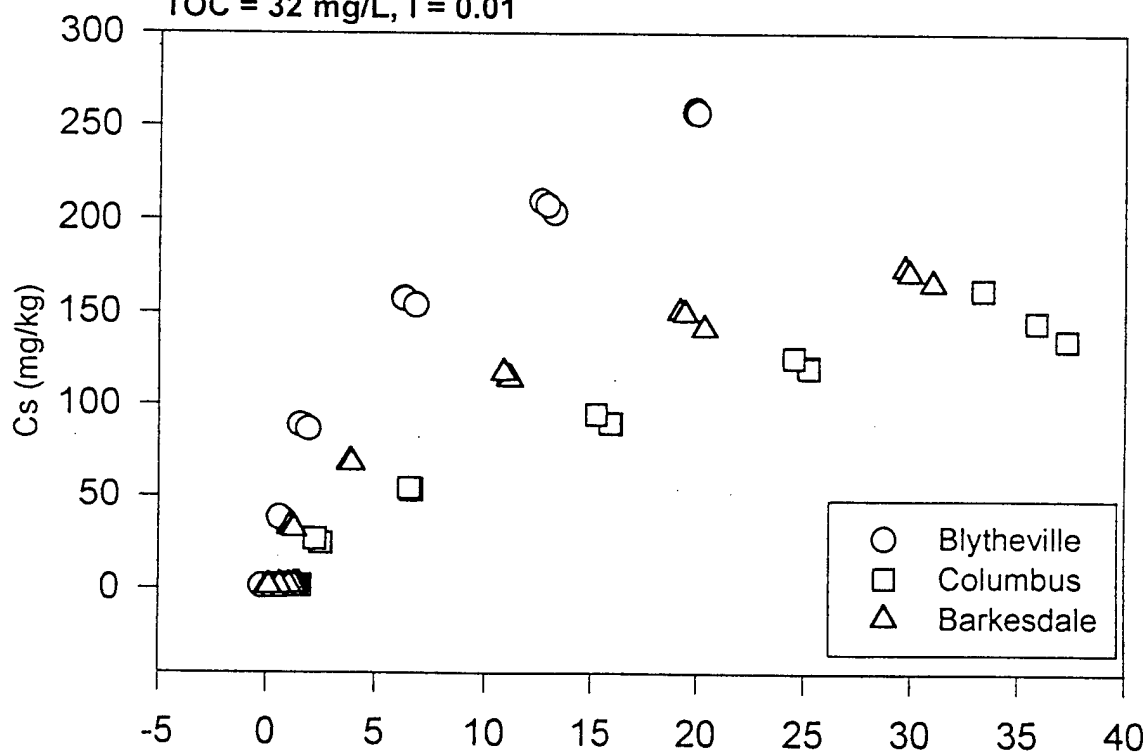


Figure 3. Freundlich Isotherm

Barkesdale, $I = 0.01$

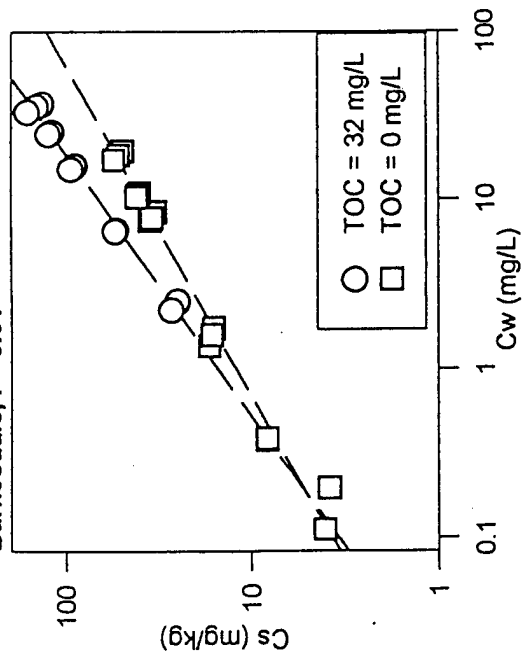


Figure 4. Freundlich Isotherm

Barkesdale, $I = 0.1$

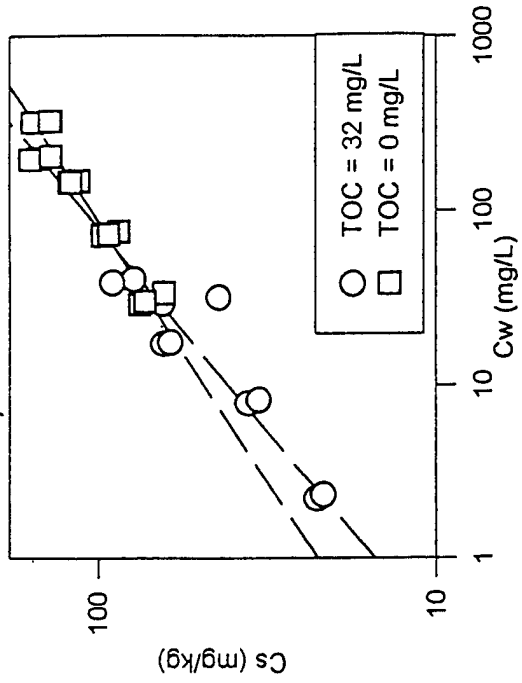


Figure 5. Freundlich Isotherm

Blytheville, $I = 0.01$

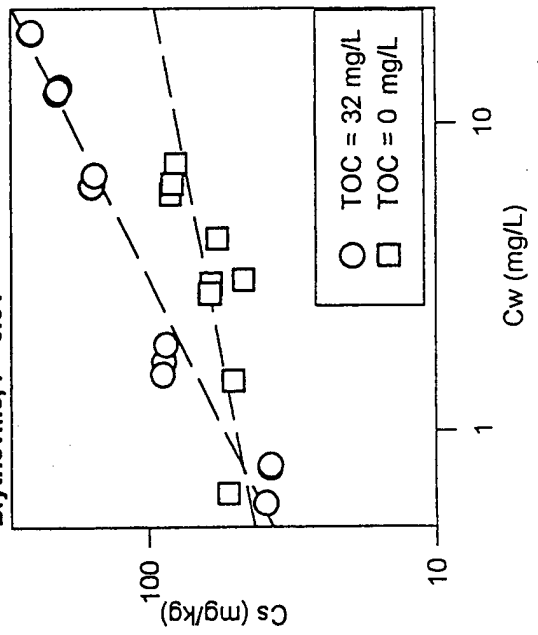


Figure 6. Freundlich Isotherm

Blytheville, $I = 0.1$

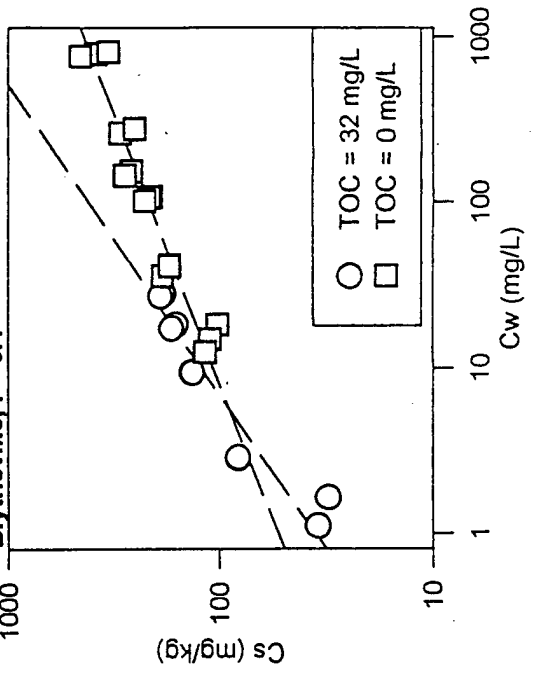


Figure 7. Freundlich Isotherm
Columbus, $l = 0.01$

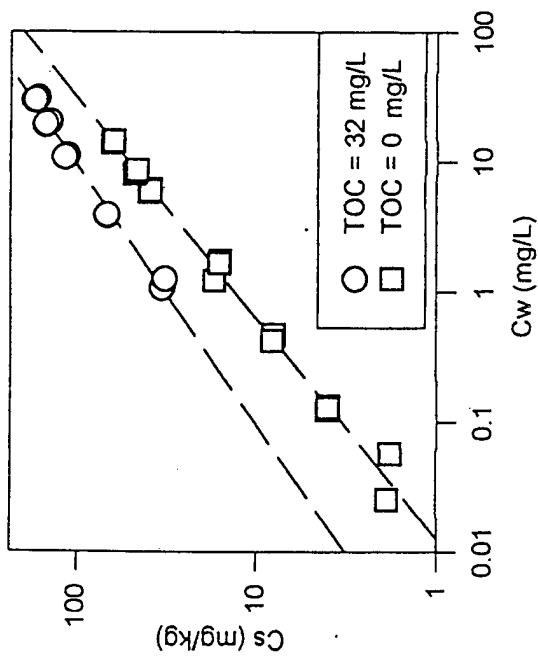


Figure 8. Freundlich Isotherm
Columbus, $l = 0.1$

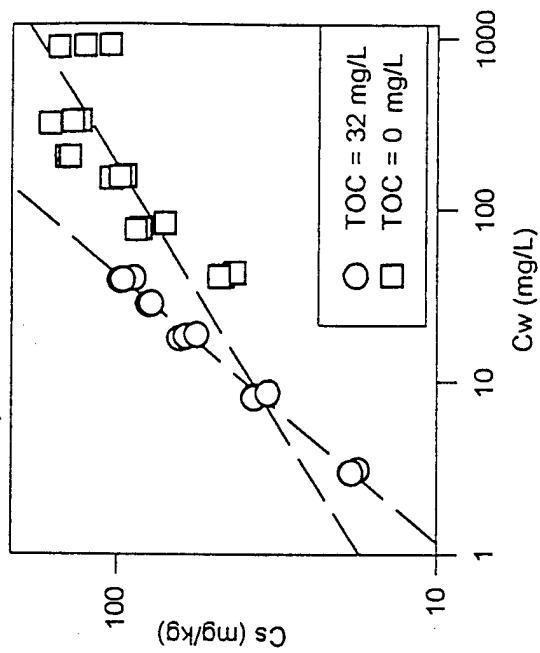


Figure 9. Sorption Isotherms: Barksdale

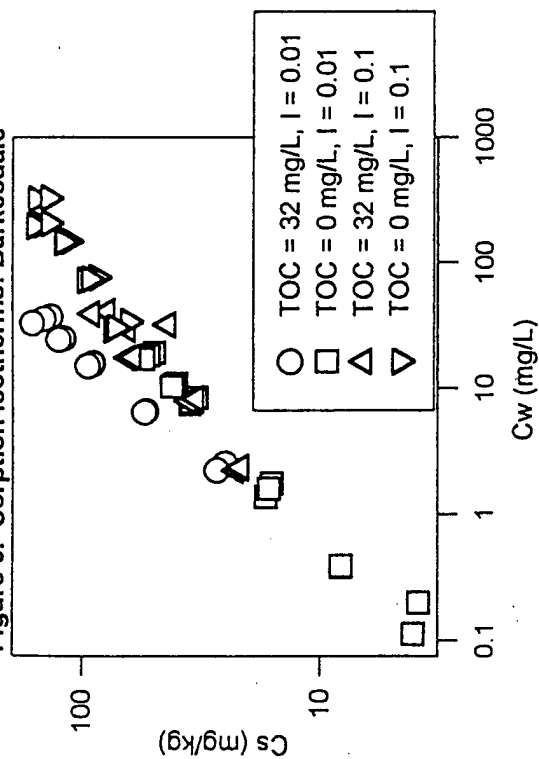


Figure 10. Sorption Isotherms: Blytheville

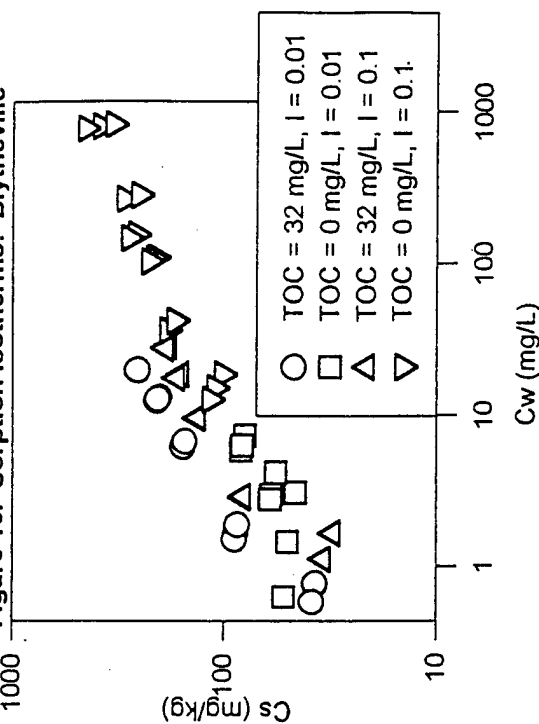


Figure 11. Sorption Isotherms: Columbus

